

Note:<注意>

Mechanical:<机械性能>



- .Contact force: 80g±20g at 1.1mm working stroke
- <接触弹力: 80g±20g在1.1mm的工作行程>
- .Full stroke: 1.6mm
- <最大行程: 1.6mm>
- .Life test: 100,000 cycles
- <寿命: 100000次>

Electrical:<电气性能>


- .Rated current & voltage: DC 12V, 2A
- <额定电压, 电流: DC 12V, 2A>
- .Contact resistance: 50 milliohm Max.
- <接触阻抗: 50 milliohm Max.>
- 100% open & short test.
- <100%导通, 短路测试>
- 专利号: ZL201420146582.X



Approve Sign

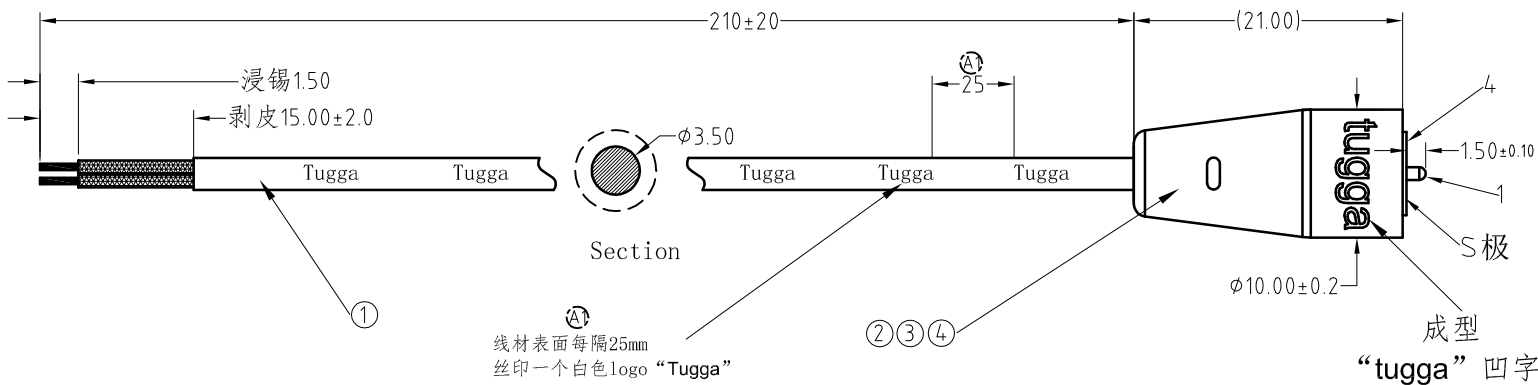

4	Magnetic Connector <磁吸接头>	M-BP60611-01000H0A	1
3	Black PVC 45P <成型外被 黑色 PVC 45P>	B000-P0002	1
2	Lucency PE <透明 PE >	B000-P9001	1
1	OD3.5 2C 24AWG Black Jacket Silicone 240mm <电子线OD3.5 2芯 24AWG 黑色 外被硅胶 240 mm>	X002-0215-XXXX	1
序号 (NO.)	规格 (Specification)	料号 (P/N)	数量 (Qty)



	A1	2016.08.15	更改LOGO首字"t"改成"T"且logo间距改到25mm
	A0	2016.07.28	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.
ANGEL	±2°	A4		
0~6	±0.10		SHEET: 1 of 1	
6~30	±0.20	DRAW		PART NO. CM-BP60631-01000H0C
30~150	±0.30	CHECK		FILE NAME BP606XX
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO		TITLE. Magnetic Cable Connector