

Note:<注意>

Mechanical:<机械性能>



- .Contact force: 80g±20g at 1.1mm working stroke
- <接触弹力: 80g±20g在1.1mm的工作行程>
- .Full stroke: 1.6mm
- <最大行程: 1.6mm>
- .Life test: 50,000 cycles
- <寿命: 50000次>

Electrical:<电气性能>



- .Rated current & voltage: DC 12V, 2A
- <额定电压, 电流: DC 12V, 2A>
- .Contact resistance: 50 milliohm Max.
- <接触阻抗: 50 milliohm Max.>
- 100% open & short test.
- <100% 导通, 短路测试>



Approve Sign

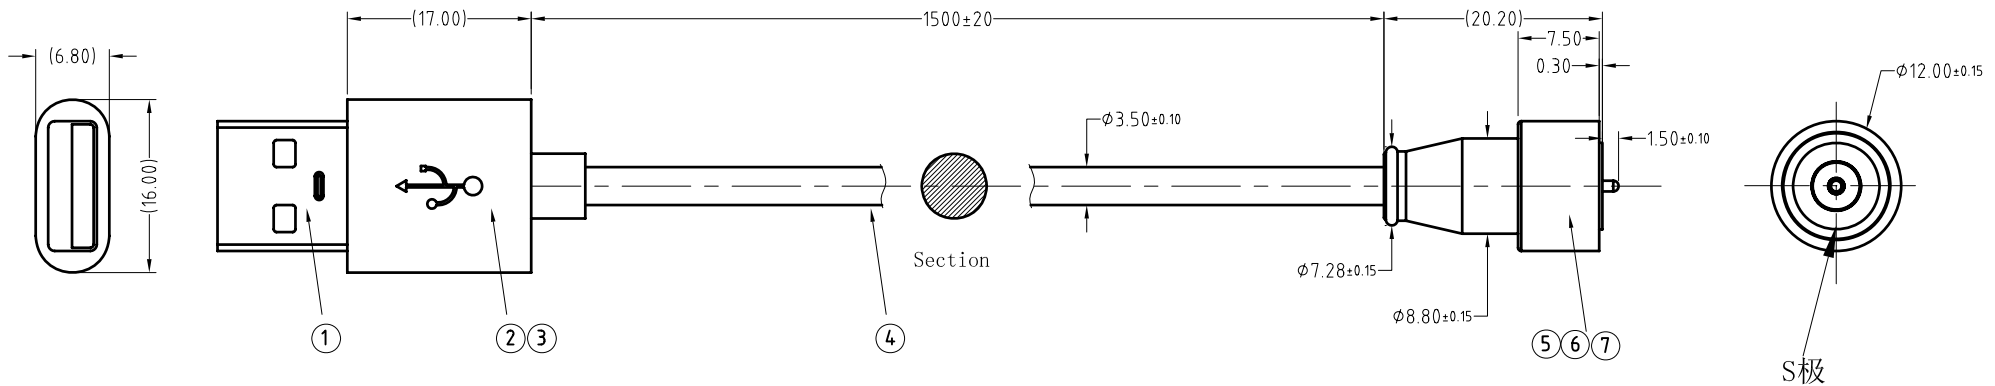

7	Pogo Pin connector 磁吸接头	M-BP14211-01000H0B	1
6	White PVC 45P 5g 白色 外被 PVC 45P 5克	B000-P0001	1
5	Lucency PE 3g <透明 PE 3克>	B000-P9001	1
4	OD3.5 2C 24AWG White Jacket PVC 55P 1520mm OD3.5 2芯 24AWG 白色 外被PVC 55P 1520mm>	X002-0112-XXXX	1
3	White PVC 45P 5g 白色 外被 PVC 45P 5克	B000-P0001	1
2	Lucency PE 3g <透明 PE 3克>	B000-P9001	1
1	USB/AM 0.025um Au White salt spray test 48H <USB/AM 0.025um金 白色 盐雾48小时>	B000-U1001	1
序号 (NO.)	规格 (Specification)	料号 (P/N)	数量 (Qty)



SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.			东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±2°	A4	SHEET: 1 of 1			PART NO.	CM-BP71321-01000H0W
0~6	±0.10				FILE NAME	BP713XX	
6~30	±0.20	DRAW			TITLE	Magnetic Cable Connector	
30~150	±0.30	CHECK					
GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO						

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	A0	2016.11.18	NEW