

Note:<注意>

Mechanical:<机械性能>

Contact force: 60g±20g at 0.8mm working stroke

<接触弹力: 60g±20g在1.0mm的工作行程>

Life test: 20,000 cycles

<寿命: 20000次>


Electrical:<电气性能>

Rated current & voltage: DC 12V, 1A


<额定电压, 电流: DC 12V, 1A>

100% open & short test.

<100%导通,短路测试>

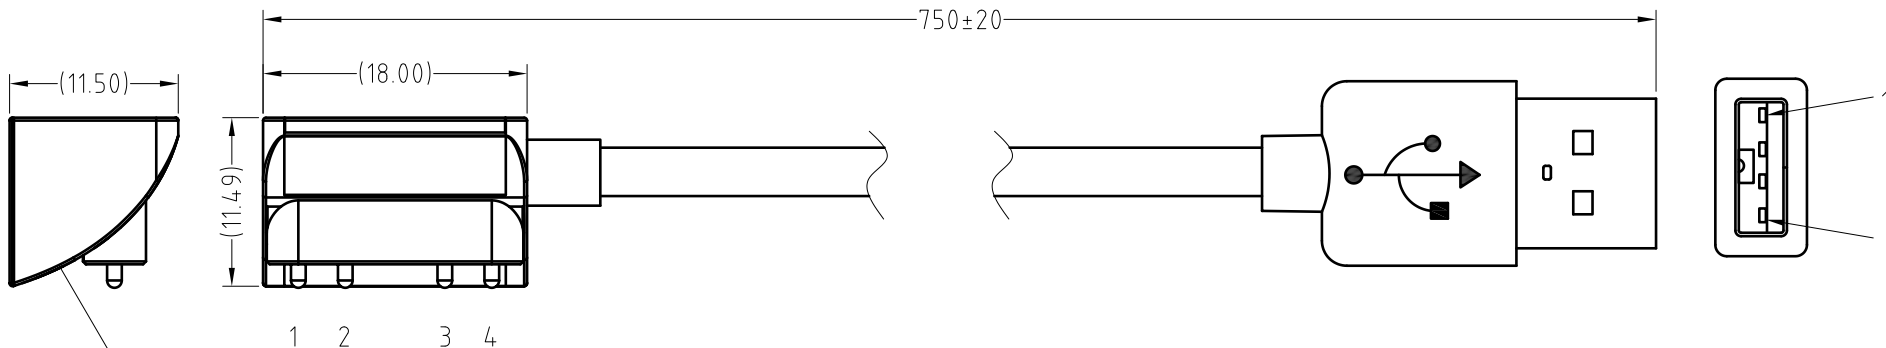

working surface N pole
工作面 N极



mode of connection
接线方式

1	Vcc	1
2	DM	2
3	DP	3
4	GND	4

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		
ANGEL	±1°	A4	SHEET: 1 of 1		
0~6	±0.05				
6~30	±0.10	DRAW	PART NO.	CM-BP23911-02130H0C	
30~150	±0.15	CHECK	FILE NAME	BP239XX	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED			APPRO	TITLE	Pogo pin connector



ECN(DCN) NO.	A0	2014.09.29	NEW
REV	DATE	DESCRIPTION	