

1

2

3

4

Note:<注意>

Mechanical:<机械性能>

.Contact force: 40g±20g at 0.6mm working stroke

<接触弹力: 40g±20g在0.6mm的工作行程>

.Life test: 20,000 cycles

<寿命: 20000次>

Electrical:<电气性能>

.Rated current & voltage: DC 12V, 1A

<额定电压, 电流: DC 12V, 1A>

.Contact resistance: 50 milliohm Max.

<接触阻抗: 50 milliohm Max.>

100% open & short test.


<100%导通,短路测试>



Approve Sign

USB

CONN

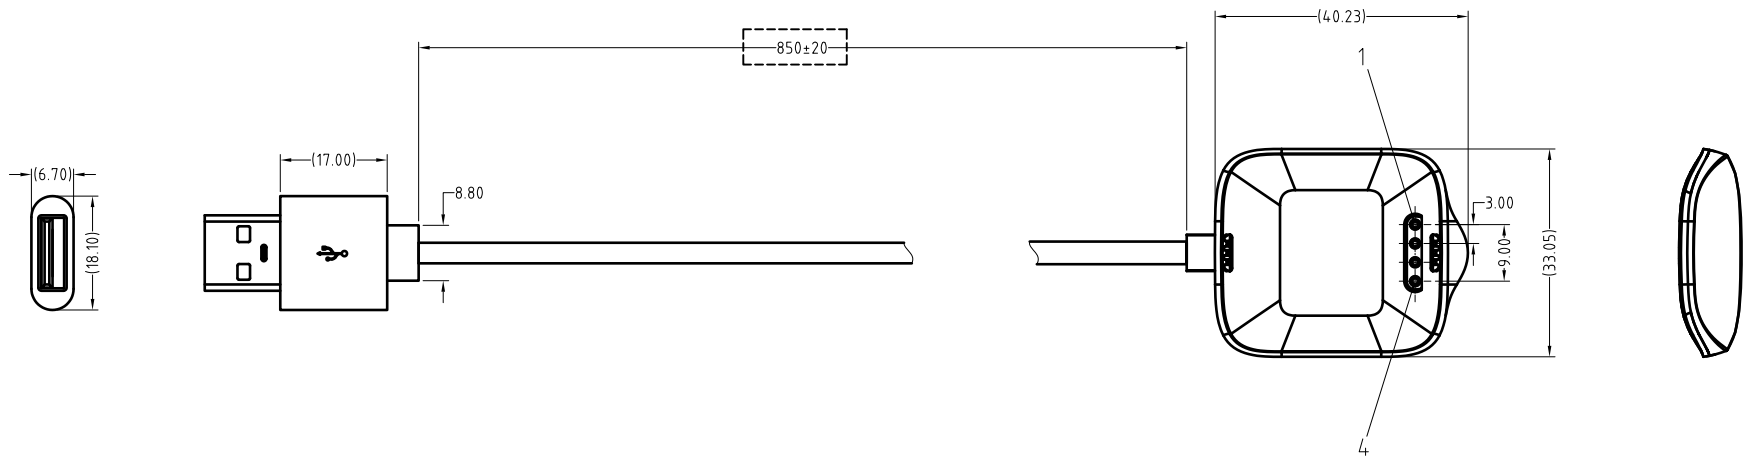

USB→CONN
1_Vcc_Red_1
2_D-_White_2
3_D+_Green_3
4_GND_Black_4

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	
ANGEL	±2°	A4		
0~6	±0.10			SHEET: 1 of 1
6~30	±0.20	DRAW		
30~150	±0.30	CHECK		
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO		

**CFE** 东莞市川富电子有限公司  
CFE CORPORATION CO.,LTD.

PART NO.	CM-BP51811-04300H0C
FILE NAME	BP518XX
TITLE.	Magnetic Cable Connector

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	D0	2015.10.06	NEW