

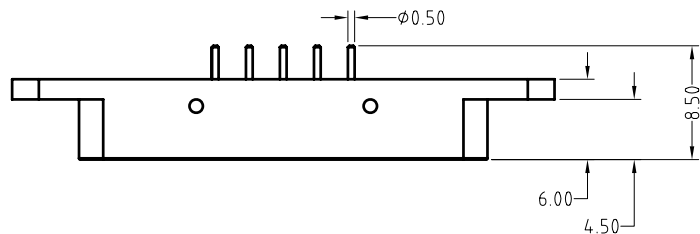
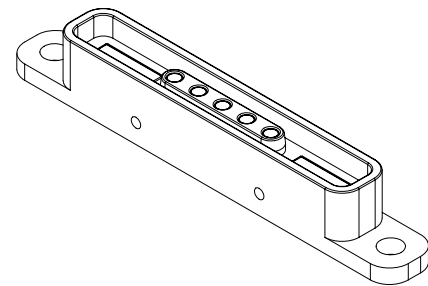
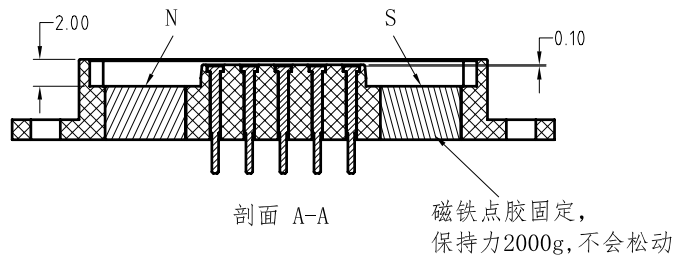


Note:<注意>  
 Electrical:<电气性能>  
 .Rated current & voltage: DC 12V, 3A  
 <额定电压, 电流: DC 12V, 3A>  
 .Contact resistance: 50 milliohm Max.  
 <接触阻抗: 50 milliohm Max.>  
 100% open & short test.  
 <100%导通,短路测试>

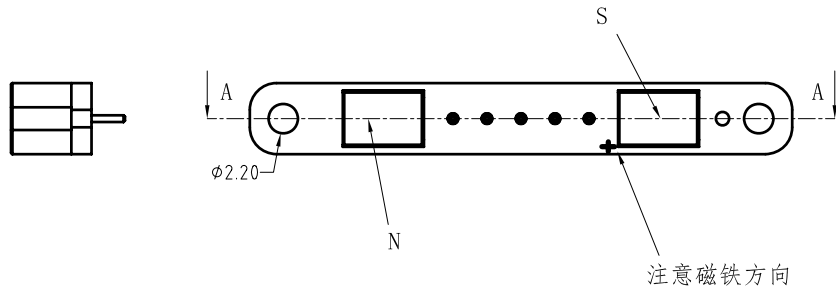

Approve Sign

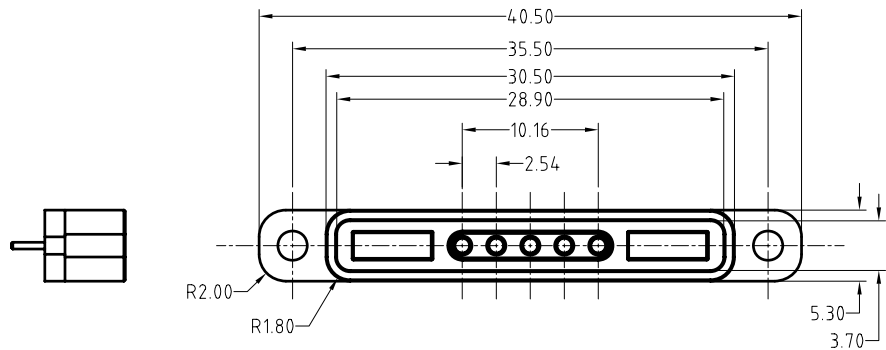

4	Pogo pin plating 0.125um Au <弹簧针 电镀金0.125um>	B709-W1005	5
3	N52 NdFeB Magnet plating Ni-Cu-Ni <N52 钕铁硼磁铁 表面镀镍铜镍>	B647-M4104	1
2	N52 NdFeB Magnet plating Ni-Cu-Ni <N52 钕铁硼磁铁 表面镀镍铜镍>	B647-M3103	1
1	Black HTN UL94 V-0 <黑色 HTN UL94 V-0>	B709-H5005	1
序号 <NO.>	规格 <Specification>	料号 <P/N>	数量 <Qty>

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	<b>东莞市川富电子有限公司</b> CFE CORPORATION CO.,LTD.		
ANGEL	±2°	A4				
0~6	±0.10		SHEET: 1 of 1		PART NO.	M-BP70901-05254A0B
6~30	±0.20	DRAW			FILE NAME	BP709XX
30~150	±0.30	CHECK			TITLE.	Pogo pin Connector
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO				

_____	A0	2016.11.05	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION