




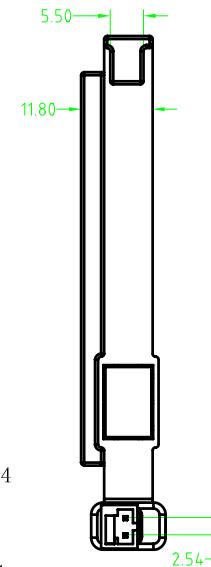
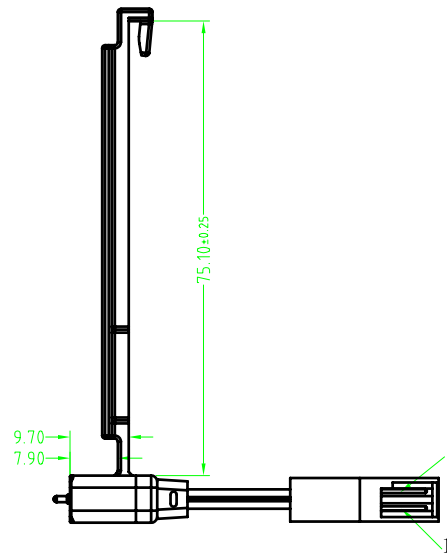


Note:<注意>
 Mechanical:<机械性能>
 .Pin contact force: 70g±20g at 2.0mm working stroke
 <Pin弹力: 70g±20g在2.0mm的工作行程>
 .Full stroke: 2.2mm
 <最大行程: 2.2mm>
 .Life test: 20,000 cycles
 <寿命: 20000次>
 Electrical:<电气性能>
 .Rated current & voltage: DC 24V, 3A .
 <额定电压, 电流: DC 24V, 3A>
 .When the current is greater than 1A then need to increase the time delay circuit(3 second)
 100% open & short test.
 <100%导通, 短路测试>

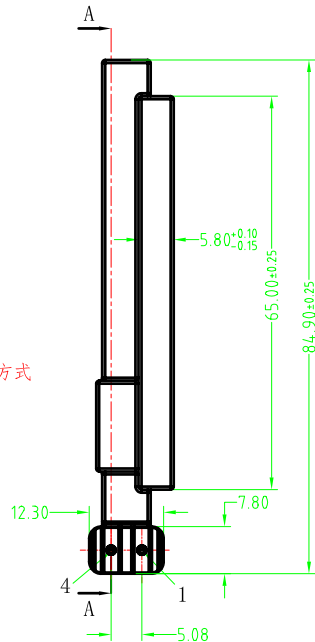

Approve Sign

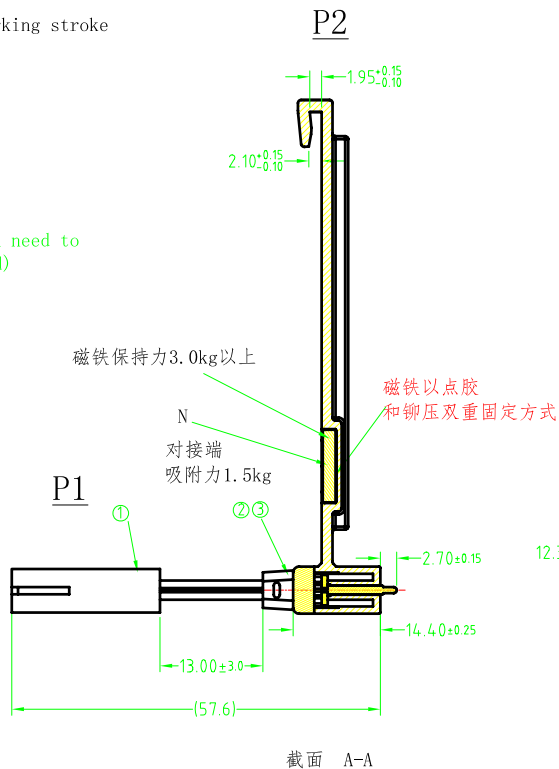

比例 0.500

3	Magnetic Connector <磁吸连接器>	MMA010001-02A1A0	1
2	Black PVC 35P <黑色 PVC 35P >	B000-P0007	3g
1	TCJ8B 端子连接器+2芯排线长24mm	1000001-1001	1
序号 (NO.)	规格 (Specification)	料号 (P/N)	数量 (Qty)

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±2°	A4			
0~6	±0.10		SHEET: 1 of 1	PART NO.	CMA-010101-02D1A0
6~30	±0.20	DRAW		FILE NAME	010101XX
30~150	±0.30	CHECK		TITLE	Magnetic cable/磁吸充电线
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO			

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	A0	2017.08.07	NEW